2 : Output Specification

200	200	200	200
1600	1600	1600	1600
1.6	1.6	1.6	1.6
1500	2000	1500	2000
11250	20000	11250	20000

3 : General Specification

	4000 Vrms
Ambient Humidity	93% non-condensing

4 : Housing Specification

Weight	145 g
Baseplate	
Material	Glass filled polyester
LED input Status Indicator	Red

5 : Circuit Block Diagram

RSS Series

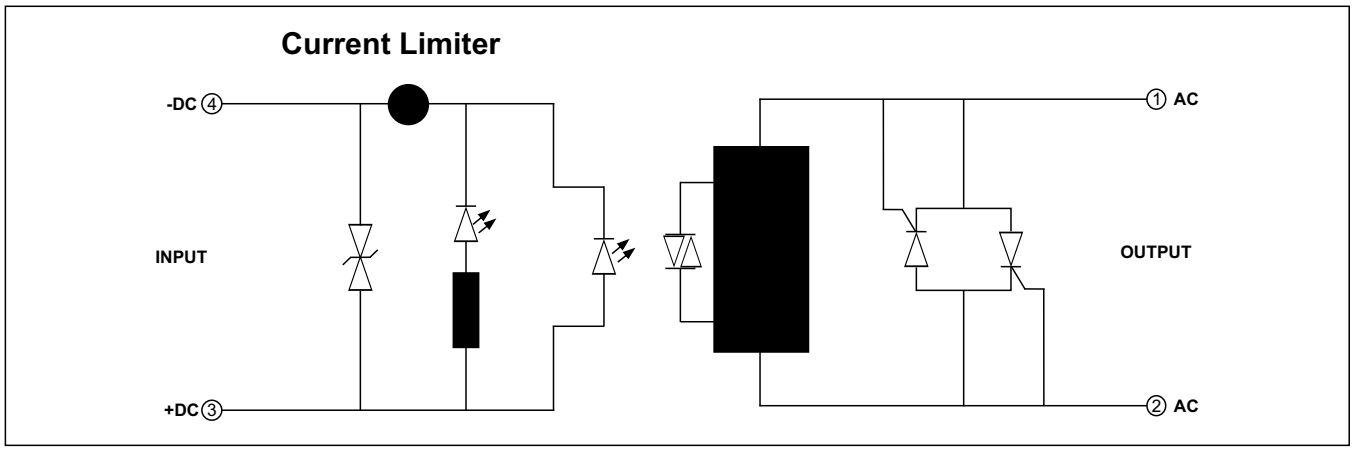

6 : Non Repetitive Surge Current

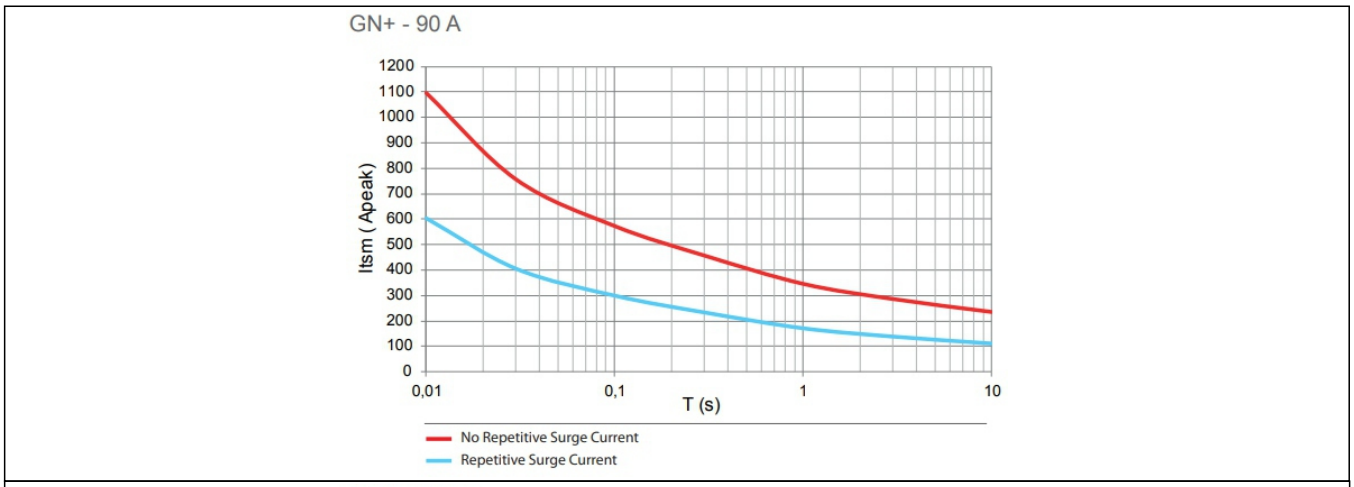

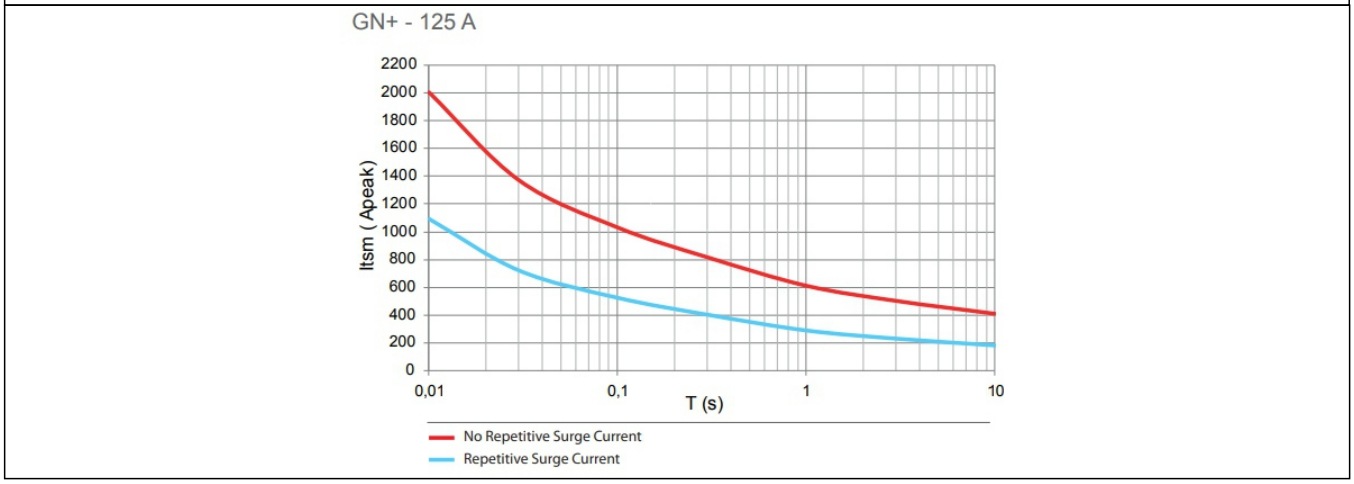

7 : Thermal Derating Curves

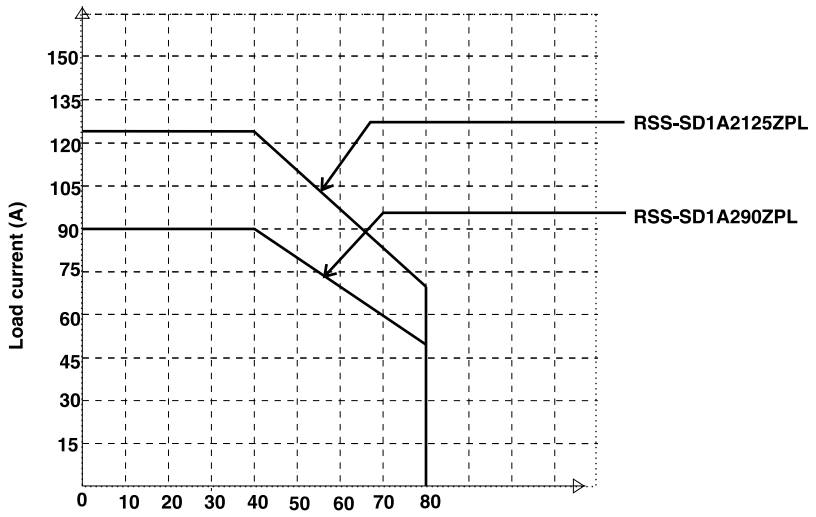

Note.: Heat sink used with a radiation efficiency of 0.1℃/W

8 : Wiring

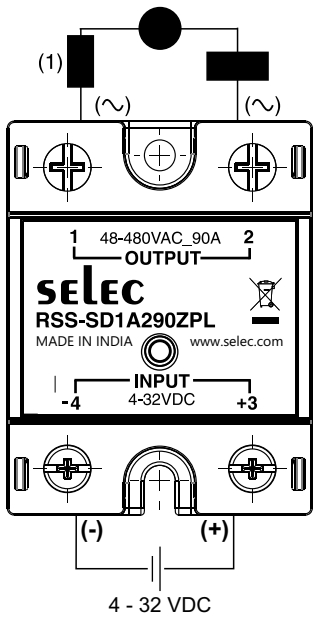

9 : Dimension (mm)

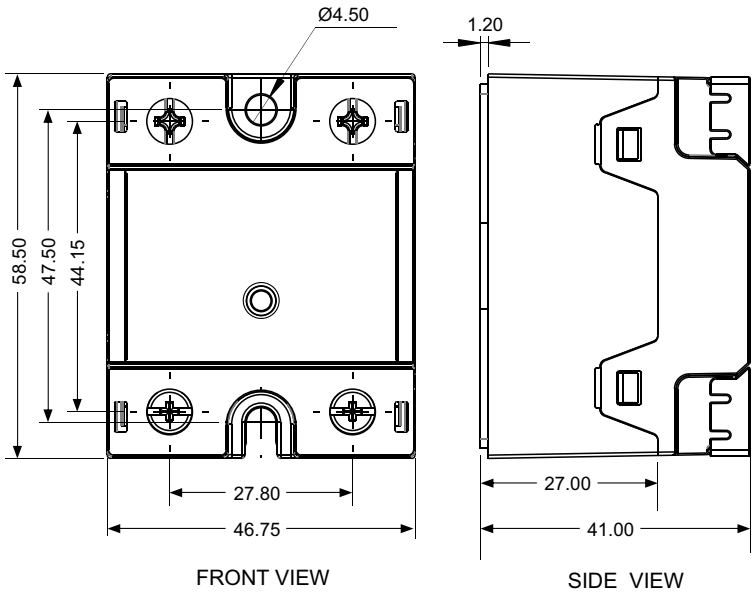

10 : Tightening Torque

Screw Size	Wire Size (Solid)	Tightening Torque
M4 Screws (control input)	18..14 AWG (0.75..2.5 mm²) 2 x 18..14 AWG (0.75..2.5 mm²)	1.2 N-m
M6 Screws (load output)	16..8 AWG (1.5..10 mm²) 2 x 16..8 AWG (1.5..10 mm²)	2.5 N-m