
3.5" LCD Resistive Touch Display


Terminal connections

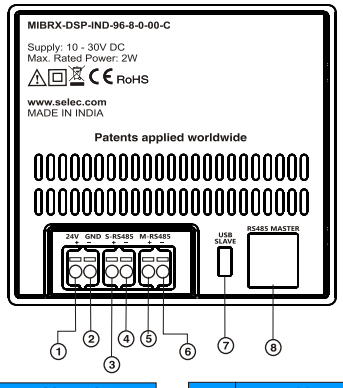

SR. NO	DISCRIPTION
1	+24V
2	GND
3	RS485 SLAVE +
4	RS485 SLAVE -

SR. NO	DISCRIPTION
5	RS485 MASTER +
6	RS485 MASTER -
7	USB SLAVE
8	RS485 MASTER (JACK)

Dimensions (All are in mm)

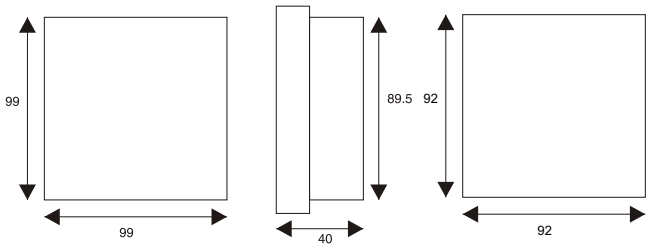

Ordering information

Product code	Description	Certification
MiBRX-DSP-IND-96-8-0-00-C	MiBRX Independent Display 96x96 - 3.5 Inch Graphic Touch	RoHS
ACH-004-CE-RoHS	Expansion Cable – RJ25 to RJ25 (6Pin)	RoHS
MiBRX-DSP-AP-2M	MiBRX 2M Adapter Plate for Extending display	RoHS
MiBRX-DSP-AP-4M	MiBRX 4M Adapter Plate for Extending display	RoHS
MiBRX-DSP-AP-6M	MiBRX 6M Adapter Plate for Extending display	RoHS
AC-USB-RS485-02	Protocol Converter Cable – USB to RS485 (2 wire)	RoHS

Accessories (To Be Ordered Separately)

Product Code	Description
Power Supplies	
RPS60-24-CE	60W, 24V/2.5A DIN rail mounted power supply in plastic housing - CE Certified
Software - www.selec.com/software	
Selpro	Windows-based software for ladder logic and built-in HMI programming
USB to Serial Driver	USB to Serial cable drivers