Supply voltage	90 to 270 VAC/ DC (50/ 60Hz)
Power consumption	6 VA max @ 230 VAC
Temperature	Operating: 0°C to 50°C; Storage: -20°C to 75°C
Humidity (non - condensing)	95% RH
Mounting	Panel
Weight	116 gms

Terminal connections

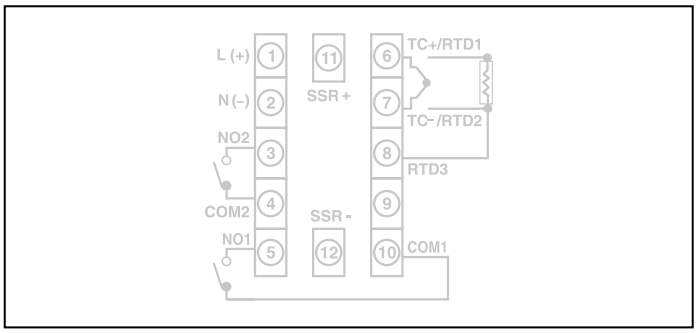

Dimensions (All are in mm)

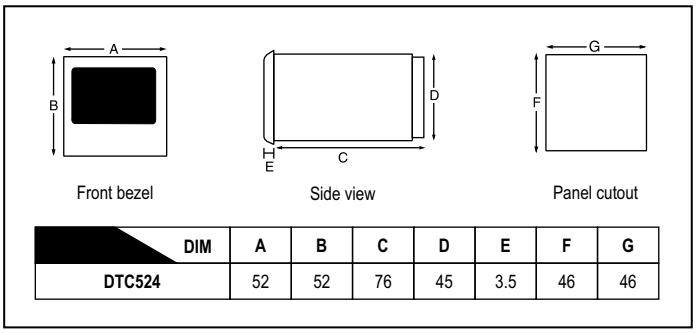

DIM	A	B	C	D	E	F	G
DTC524	52	52	76	45	3.5	46	46

Ordering information

DTC524	RELAY (5A)	SSR (12 VDC)	RELAY (5A)	90 to 270 VAC/ DC	- - -