



Features :

3+3 digits, 7 Segment LED, Dual display

Multifunction, Multi-range Timer

Single set point


Compact size

Certifications :


Technical specifications

Display	3+3 digits, 7 segment LED, Dual display Upper display: White Lower display: Green
LED indication	Relay: R, Seconds (S), Minutes (M), Hours (H)
Accuracy	Setting: $\pm 0.05\%$ of set time or 50msec (Whichever is greater), Repeat: $\pm 0.05\%$
Start input	Gate/ Pulse (Programmable)
Contact rating	Relay: NO: 10A 250 VAC/ 24 VDC NO/ NC: 5A/ 5A 250 VAC/ 24 VDC
Relay contact	2X SPDT
Modes	ON delay, Interval, Cyclic ON first, Cyclic OFF first
Time ranges	9.99/ 99.9/ 999 sec, 9.59 min: sec, 99.9/ 999 min, 9.59 hour: min, 99.9/ 999 hr
Resolution	0.01sec
Counting direction	Up/ Down (selectable)
Set point	1
Time setting	By keys on front panel
Reset	Front, Remote, On power interruption (programmable)
Memory retention	10 years
Configuration lock	Yes
Supply voltage	90 to 270 VAC/ DC (50/ 60Hz)
Power consumption	5 VA max @270 VAC/ DC
Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: - 20 to 75°C (- 4 to 167°F)
Humidity (non - condensing)	95% RH
Mounting	Panel mount
Weight	XT246A: 165 gms XT346A: 220 gms


Terminal connections

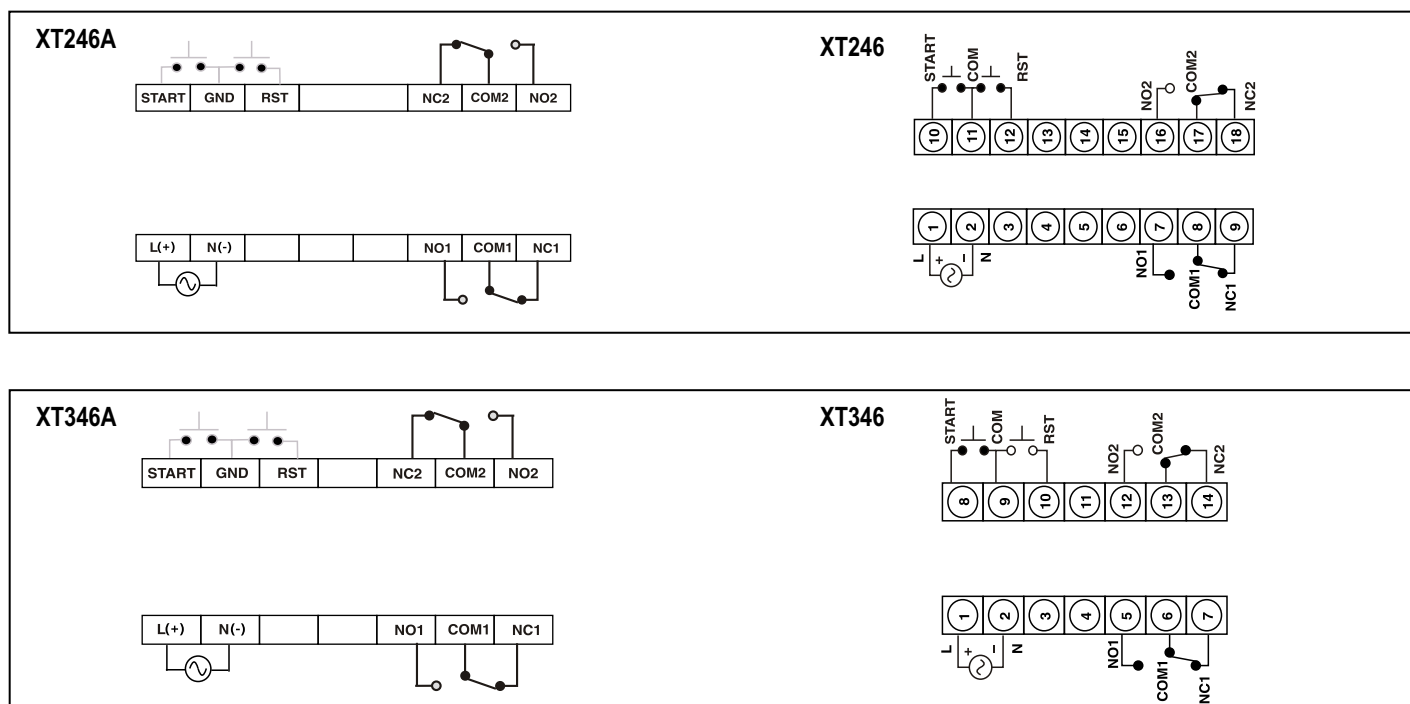

Timing diagrams

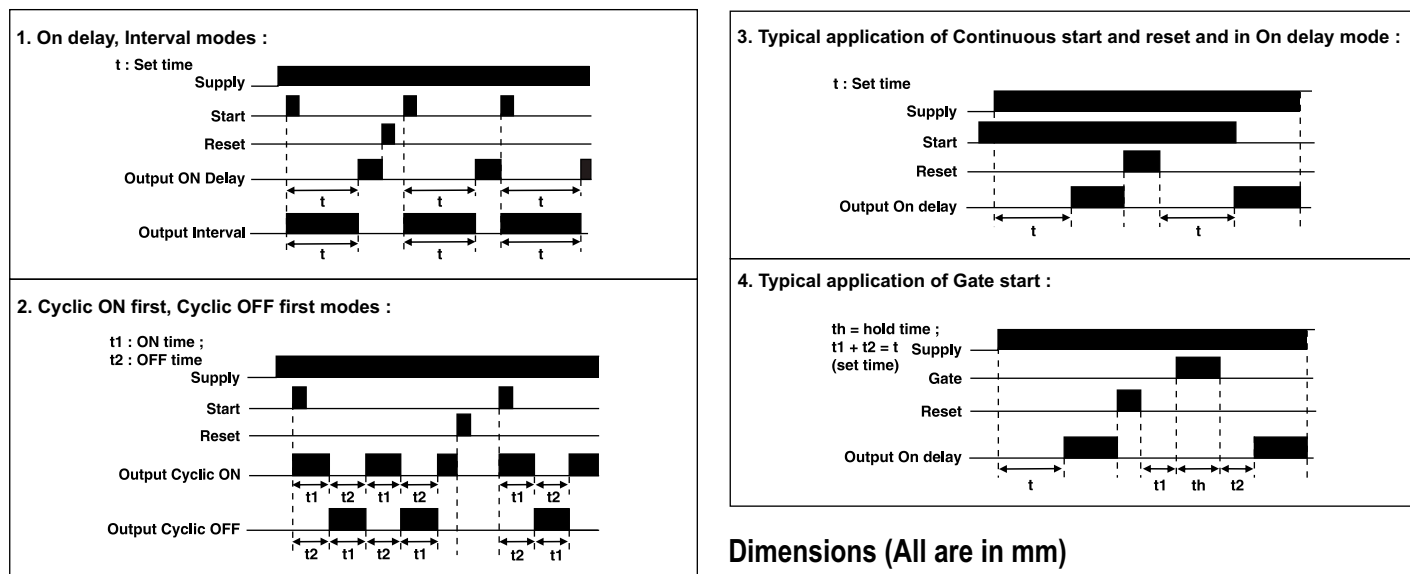

Dimensions (All are in mm)

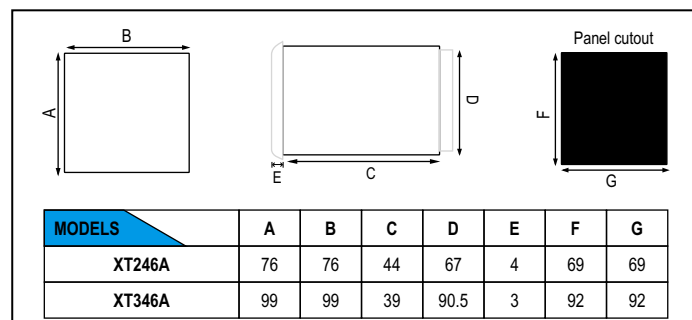

Ordering information

Product code	Output1	Output2	Supply voltage	Certification
XT246A	RELAY (5A)	RELAY (5A)	90 to 270 VAC/ DC	
XT346A	RELAY (5A)	RELAY (5A)	90 to 270 VAC/ DC	