Terminal connections



Dimensions (All are in mm)

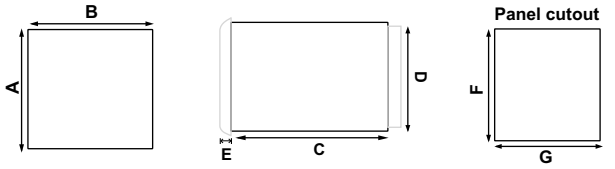

DIM	A	B	C	D	E	F	G
DXT541	52	52	76	45	4	46	46

Timing diagrams

1. On delay, Interval modes :

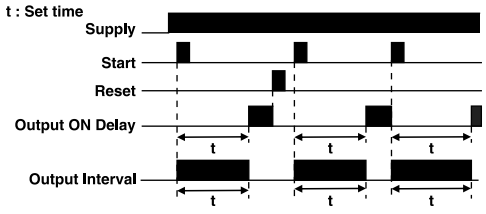

2. Cyclic ON first, Cyclic OFF first modes :

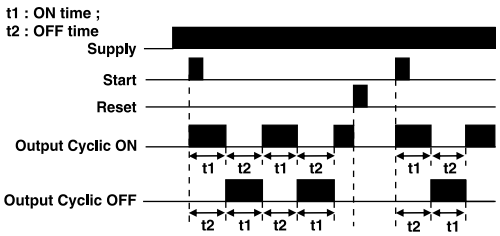

3. Typical application of Continuous start and reset and in On delay mode :

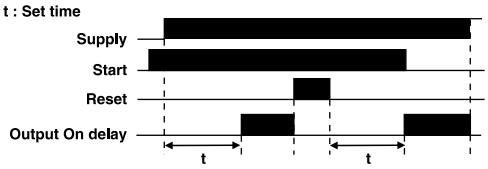

4. Typical application of Gate start :

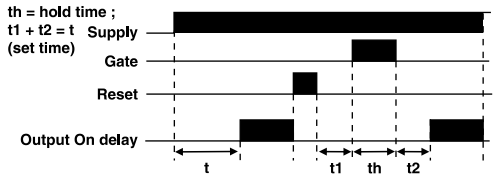

Ordering information

DXT541	RELAY (5A)	RELAY (5A)	90 to 270 VAC/ DC	**- - -**